


RoughDeck™ Accessories Portability Frames

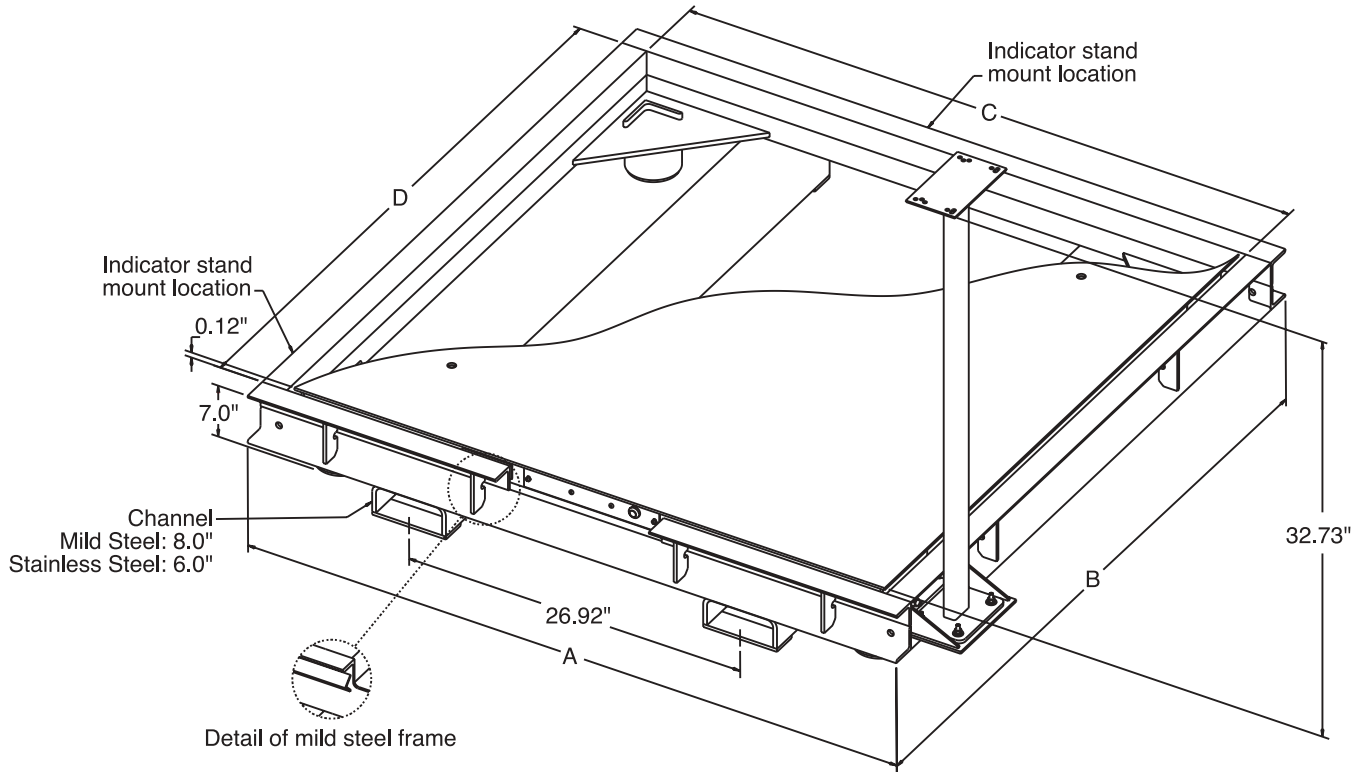

RoughDeck HP Portability Frames

PART #	SIZE (W x L)	EST. SHIP WEIGHT
77943	4' x 4'	260 lb
77944	5' x 5'	385 lb
19352	Floor stand for indicator, 36.3" high, mild steel*	11 lb
79068	Indicator stand mounting bracket	5 lb

RoughDeck SS Portability Frames

PART #	SIZE (W x L)	EST. SHIP WEIGHT
77945	4' x 4'	260 lb
77946	5' x 5'	385 lb
28740	Floor stand for indicator, 36.3" high, stainless steel*	11 lb
79069	Indicator stand mounting bracket	5 lb

* Works with IQ plus 310, IQ plus 355, IQ plus 390 DC, IQ plus 590 DC, IQ 700, UMC444, UMC555

Portability Frame Dimensions

4' x 4'

A:	51.92 (1318 mm) mild steel
	52.75 (1339 mm) stainless steel
B:	51.92 (1318 mm) mild steel
	52.75 (1339 mm) stainless steel
C:	48.75 (1238 mm)
D:	48.75 (1238 mm)

5' x 5'

A:	63.92 (1623 mm) mild steel
	64.75 (1644 mm) stainless steel
B:	63.92 (1623 mm) mild steel
	64.75 (1644 mm) stainless steel
C:	60.75 (1543 mm)
D:	60.75 (1543 mm)
Distance from floor to inside of strap on the fork entry	
	Mild Steel: 3/4"
	Stainless Steel: 1/2"
Distance from inside of strap to top of the fork entry	
	Mild Steel: 2"
	Stainless Steel: 2 1/4"

NOTE: Consult factory if you intend on using with a pallet jack to confirm modifications are not required.